

MagHex Fan Controller

Compact Programmable Temperature Sensor



This combined sensor and controller is designed to mount directly to the heat exchanger. It provides accurate temperature control by cycling the electric cooling fan to maintain desired oil temperature. A single housing reduces wiring and mechanical installation. The MAGHEX magnetic wand is used to set up and program the sensor. Not needed for operation. LEDs indicate the oil temperature setting.

Features

- Easy installation and integration into MA Series (any SAE#8 port or cavity).
- Creates a simple drive circuit with just a few wires and minimal programming.
- Low cost alternative to complex control systems.
- Utilize built-in temperature sensor to activate the fan based upon current set point.
- Capable of providing on board programming & status without the additional component requirements.
- 12 or 24 volt DC operation up to 30 amps.
- Temperature sensor and operation controller in single aluminum housing.
- Select from 20 temperature settings from 100°F to 200°F (38 to 93°C)
- Mounts directly to the cooler.
- Connector to fan is included and pre-wired.
- Solid-state design, no moving parts, fully sealed microprocessor/FET design.
- Manual override feature built-in.
- Shuts off 7 degrees below set point.
- Improved circuitry to accommodate higher amperage applications.
- Housing is used as a heat sink for internal components.
- Automatic low voltage shut down.
- Proportional Speed Control (Brushless version only)

Installation

1. Insert controller sensor into #8 SAE sensor port on cooler.
2. Connect controller to DC fan (see wire diagram).
3. Provide 30 amp slow fused power to the fan.
4. Connect 2 amp fused power to controller (see wire diagram).
5. Use MAGHEX Programming Wand to set controller to desired temperature.

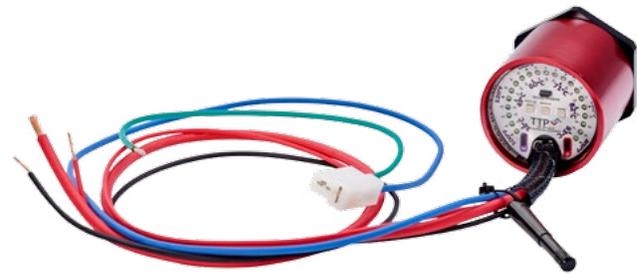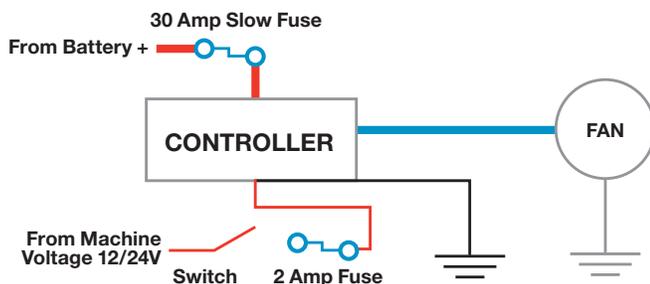

Single Fan Controller - Part Number 57565 Dual Fan Controller - Part Number 57566

This sensor will drive one single fan or two dual fans based on 20 adjustable set points in 5°F degree increments from 100°F to 200°F (38 to 93°C).



PWM Variable Fan Controller Part Number 57567

This sensor will drive one PWM fan based on 20 adjustable set points in 5°F degree increments from 100°F to 200°F (38 to 93°C). There must be a minimum of 20°F degrees between the two set points (20-100% ramp).

Specifications

Operating Voltage	12 or 24 VDC Systems
Min/Max Voltage	9 VDC / 32 VDC
Current Rating	30 AMPS
Switch Type	Normally open, high side
Ambient Operating Temperature	-40° to +185°F (-40° to +85°C)
Measurement Temperature Range	100°F to 200°F (38 to 93°C)
Current Draw	20 mA
Setpoint Selections	20 set points in 5°F degree increments from 100°F to 200°F (38 to 93°C)
Selection method	Magnetic programming wand
Enclosure Rating	IP69K
Sealed Housing	High-grade Automotive Potting Compound
Housing Material	Anodized Aluminum
Weight	Approximately 8 OZ (.23 KG) including wire
Mounting	#8 SAE Thread
Fan Connector	AMP Connector - Single and Dual Controllers Yazaki Connector - PWM Variable Controller